


BOULEVARD

The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.



NEW

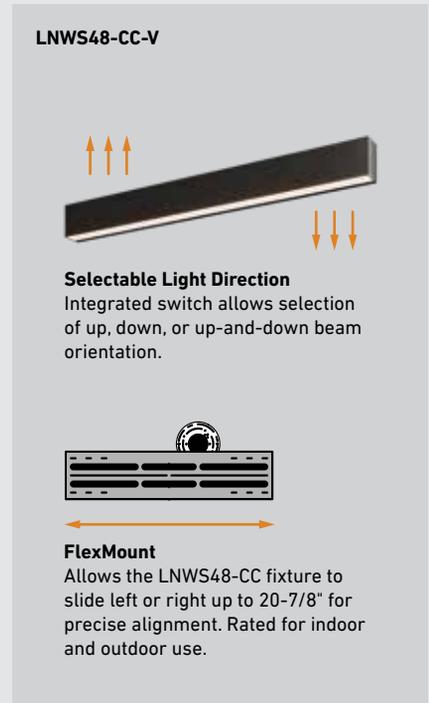

COLOR SELECT*



T24
JA8
CERTIFIED



SELECTABLE LIGHT DIRECTION*



Bluetooth+



LNPDS48-CC



LNPDS-ACC90-CC



More from this family



LNR24-CC
DCP-LNR24
pg. 48



LNR48-CC
DCP-LNR48
pg. 48



LNR-ACC90-CC
pg. 48

*FlexMount allows the LNWS48-CC fixture to slide left or right up to 20-7/8" for precise alignment.

Selectable Light Direction – integrated switch allows selection of up, down, or up-and-down beam orientation.

Available in 2200K, 2700K, 3000K, 3500K, and 4000K.

†DCP-LNPD48 only

NEW

BOULEVARD

The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.



COLOR SELECT*



T24
JA8
CERTIFIED



FLEXMOUNT*



Bluetooth⁺



CHANGE COLORS[†]

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
LNP48-CC	48"	40 W	2805 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming or V: 120 / 277 / 347V 0-10V dimming
LNP48-CC	48"	40 W	2805 lm			
LNFM48-CC	48"	40 W	3000 lm			
LNP48-ACC90-CC	6"	6 W	420 lm			
LNWS48-CC-V	48"	47 W	4000 lm		2200, 2700, 3000, 3500, 4000 K	V: 120 / 277 / 347V 0-10V dimming
DCP-LNP48	48"	40 W	2620 lm	90	RGB + 2700 K - 6500 K	120 V

*FlexMount allows the LNWS48-CC fixture to slide left or right up to 20-7/8" for precise alignment.


Rated for indoor and outdoor use.

Adjustable Beam Direction – integrated switch allows selection of up, down, or up-and-down beam orientation.


Available in 2200K, 2700K, 3000K, 3500K, and 4000K.

†DCP-LNP48 only


LNPD48-CC, DCP-LNPD48

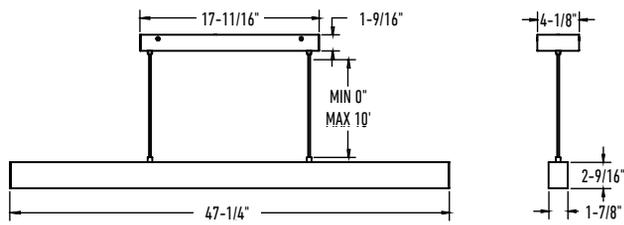


LNFM48-CC

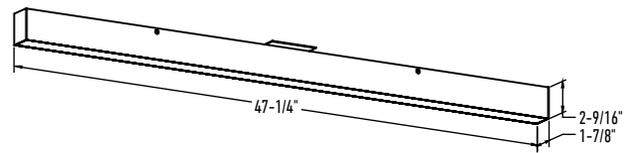

LNPDSC48-CC

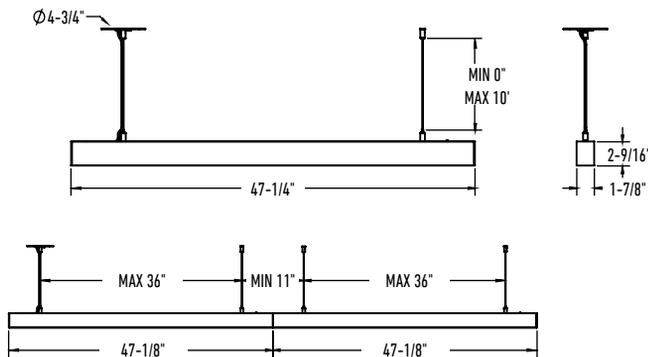


LNWS48-CC-V

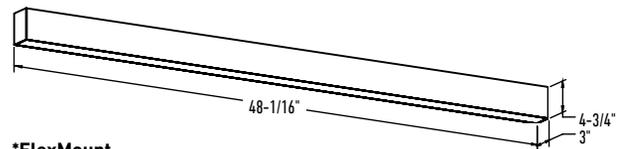

***FlexMount**
LNWS48-CC allows fixture to slide left or right for precise alignment with surrounding elements. Rated for indoor and outdoor use.

LNPDSC-ACC90-CC



Specifications

Switch-selectable CCT
Unique 20% up/ 80% down light output (LNPD48-CC, LNPDSC48-CC, LNPDSC-ACC90-CC only)
Multiple fixtures can be linked together
LNFM48 can be mounted on 4" octagon junction box or directly on the ceiling
Adjustable height up to 10 feet
Aluminum housing which serves as a highly efficient heat sink
Optional round plate included to conceal the junction box
Sliding mounting bracket on LNWS48-CC wall sconce for easy adjustability
3-position switch for light output on LNWS48-CC wall sconce (up, down, up/down)
Full color spectrum and 2700–6500K in pure whites (DCP-LNPD48 only)
Dimmable via the DALI Connect app and the DCP-RMCT remote (DCP-LNPD48 only)
5-year warranty

Finish

- **BK** Black
- **WH** White (CC models only)

Accessories

- LNACC-L16FT**
16-foot lens for Boulevard series pendants, flush mounts and recessed linears
- DCP-RMCT**
Smart remote for DCP-LNPD48
- DCP-HUBV2**
DALI Connect Pro Hub for DCP-LNPD48

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.